

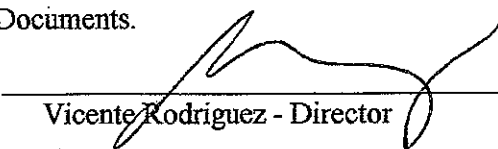
ADDENDUM NO. 3
CITY OF HIALEAH
CITY HALL
RE-ROOFING
501 PALM AVE.
HIALEAH, FLORIDA

January 13, 2016

TO ALL CONCERNED

The original Contract Documents, for the Project entitled **CITY OF HIALEAH – CITY HALL RE-ROOFING BID NO. 2015/16-3230-00-009** is hereby amended as noted in this **Addendum No. 3**.

This **Addendum No. 3** consists of **1** Typed Pages, **0** Sketches, **1** Attachment and **0** Drawings. All other items and conditions of the original Contract Documents shall remain unchanged. This Addendum shall become a part of the Contract Documents.

Approved for issue:  Date: January 13, 2016
Vicente Rodriguez - Director

ACKNOWLEDGEMENT

Receipt of this **Addendum No. 3** shall be acknowledged in the space provided on the **ADDENDUM RECEIPT FORM (ARF)** (copy attached) now a part of the Contract Documents faxed immediately to City of Hialeah @ (305) 687-2642, and submitted with sealed bids.

IN THE CONTRACT DOCUMENTS:

CLARIFICATION:

1. The Sure-flex PVC FRS Membrane Roofing system submitted by Carlisle SynTec Systems on January 12, 2016, is approved as an equal. Please see attached letter from the manufacturer.

RE-ROOFING 2015/16-3230-00-009

PAGE 1 OF 1
END OF ADDENDUM NO. 3



Tuesday, January 12, 2016

Vincente Rodriguez
City of Hialeah – Construction & Maintenance

**Re: Hialeah City Hall
Hialeah, FL**

To Whom It May Concern:

This letter is to acknowledge the proposed roofing assembly for warranty consideration by Carlisle SynTec.

The assembly is as follows;

Deck:	Structural concrete deck. If residual or unexposed asphalt is present on the deck surface, it must be primed with CCW 702 or Cav-Grip Primer.
Insulation:	Install minimum 1.5" thick Tapered Carlisle HP-H Polyisocyanurate insulation (4'x4' boards) adhered with FAST Adhesive at 12" on center bead spacing in the field and 6" on center bead spacing in the perimeters and corners.
Membrane:	Install 60-mil Sure-Flex PVC FRS Membrane fully adhered with Carlisle PVC Bonding Adhesive.

Note: Low flashing heights will not prohibit the issuance of the Carlisle Warranty. Carlisle does require the membrane termination be above the anticipated water line.

Upon completion of an inspection by a Carlisle Field Service Representative to confirm that the roof system has been installed in accordance to Carlisle Specifications, Carlisle will honor a 20-year warranty. Unless purchased or supplied through Carlisle, please note that performance, integrity, and impact of products by others is not included under coverage of the Carlisle Total System Warranty

If you have any questions or require additional information, please contact our office.

Sincerely,

A handwritten signature in cursive script that reads "Ariel M. Andrejev".

Ariel M. Andrejev
Design Analyst
Carlisle SynTec Systems

ADDENDUM RECEIPT FORM

CITY OF HIALEAH

**CITY HALL
RE-ROOFING
501 PALM AVE
HIALEAH, FLORIDA**

CONTRACTOR'S NAME _____

ADDRESS _____

PHONE NO. _____ **FAX NO.** _____

CONTACT NAME _____ **SIGNATURE** _____

THE BIDDER ACKNOWLEDGES RECEIPT OF THE FOLLOWING ADDENDUM BY SIGNING AND DATING BELOW: COPY OF THIS FORM MUST BE FAXED AND IMMEDIATELY TO CITY of HIALEAH @ (305) 687-2642.

ADDENDUM

SIGNATURE

DATE

3

RE-ROOFING 2015/16-3230-00-009

ARF